

C. Blumstein  
Bldg 348

NOLTR 68-30

DEVELOPMENT OF THE CONTINUOUS  
WIRE METHOD  
PROGRESS REPORT IV. COMPARISON  
WITH OPTICAL MEASUREMENTS OF  
DETONATION PROPERTIES

NOL

2 APRIL 1968

UNITED STATES NAVAL ORDNANCE LABORATORY, WHITE OAK, MARYLAND

20060608050

NOLTR 68-30

Distribution of this document is unlimited.

DEVELOPMENT OF THE CONTINUOUS WIRE METHOD  
PROGRESS REPORT IV. COMPARISON WITH OPTICAL MEASUREMENTS  
OF DETONATION PROPERTIES

Prepared by:

J. P. Toscano, A. R. Clairmont Jr., I. Jaffe, & D. Price

ABSTRACT: Measurements made with the continuous wire method are compared to those obtained optically of shock-to-detonation transitions in cast Comp B. The electronic and optical results are equivalent in detonation velocity measurements as they are for other explosives. For the transitional phenomena (e.g., delay time and run-length) the electronic method is much less precise than the optical. Hence the continuous wire method is not adequate for making such measurements in cast Comp B.

Published 4 April 1968

Approved by:

Carl Boyars, Chief  
Advanced Chemistry Division  
CHEMISTRY RESEARCH DEPARTMENT  
U. S. NAVAL ORDNANCE LABORATORY  
WHITE OAK, MARYLAND

NOLTR 68-30

2 April 1968

DEVELOPMENT OF THE CONTINUOUS WIRE METHOD PROGRESS REPORT IV.  
COMPARISON WITH OPTICAL MEASUREMENTS OF DETONATION PROPERTIES

The work reported here was carried out under the task MAT 03L 000/  
Roll 01 01 Prob 059, Transition from Deflagration to Detonation.  
This report is the fourth on the development work designed to make  
the continuous wire method useful in studying the shock-to-detonation  
transition of high explosives. Earlier work was reported in  
NOLTRs 63-136, 66-21, and 67-10.

E. F. SCHREITER  
Captain, USN  
Commander

*Albert Lightbody*  
ALBERT LIGHTBODY  
By direction

CONTENTS

	Page
INTRODUCTION . . . . .	1
EXPERIMENTAL . . . . .	1
DISCUSSION OF RESULTS . . . . .	2
Measurement of Detonation Velocity . . . . .	2
Transitional Phenomena, Optical Records . . . . .	2
Transitional Phenomena, Electronic Records . . . . .	6
CONCLUSIONS . . . . .	10
REFERENCES . . . . .	15

ILLUSTRATIONS

Figure	Title	Page
1	Electronic Records for Shot 13 (Gap thickness 145 cards) . . . . .	4
2	Optical Record of Shock-to-Detonation Transition for Shot 13 (Gap thickness 145 cards) . . . . .	5
3	$\tau_a$ vs $X_l$ from Smear Camera Measurements in Cast Comp B . . . . .	8
4	$P_e$ vs $X_l$ from Smear Camera Measurements in Cast Comp B . . . . .	8
5	$\tau$ vs $X_l$ from Continuous Wire measurements in Cast Comp B . . . . .	11
6	$P_e$ vs $X_l$ from Continuous Wire Measurements in Cast Comp B . . . . .	11
7	Electronic vs Optical Measurements in Cast Comp B . . . . .	12

TABLES

Table	Title	Page
1	Continuous Wire and Smear Camera Measurements of Detonation Velocity in Cast Comp B . . . . .	3
2	Optical and Electronic Measurements of Run Length and Delay Time in Cast Comp B . . . . .	7
3	Measurements in Two and Three Wire Charges of Comp B . . . . .	13

DEVELOPMENT OF THE CONTINUOUS WIRE METHOD  
 PROGRESS REPORT IV. COMPARISON WITH OPTICAL MEASUREMENTS  
 OF DETONATION PROPERTIES

INTRODUCTION

This is the fourth report on application of the continuous wire method to studying shock-to-detonation transitions. This method uses three embedded wires which are parallel to the charge axis; two are copper and the third a Moleculoy resistance wire. The wires form two constant current circuits, the Cu-Cu and the Moleculoy-Cu, as diagrammed in the previous report.<sup>1</sup> As a detonation reaction sweeps down the charge, the length and corresponding resistance of the Moleculoy wire remaining in the circuit decrease. In principle, the position of the detonation front as a function of time can be obtained from the oscilloscope record of resistance vs time.

The purpose of the present work was to compare continuous wire measurements with those obtained optically on the same charge. Cast Comp B was used throughout this study as a typical high explosive.

EXPERIMENTAL

All charges were of Comp B (60/40/1, RDX/TNT/Wax). They were cast, as previously described,<sup>2</sup> about three wires held under tension in a cylindrical mold. A No. 32 Cu ground wire runs along the axis and is paralleled on either side by another Cu wire and by the Moleculoy resistance wire. The shot design, experimental procedure, and electronic circuitry were identical with those of the previous work.<sup>1</sup> In addition, a 70 mm smear camera was used, at a writing speed of 4 mm/ $\mu$ sec, to follow the shock-to-detonation phenomena which appeared on the surface of the cylindrical charge. The camera slit was focused on the charge surface, parallel to the longitudinal axis, and viewed the entire length of the charge. An argon bomb was used to illuminate the initiating shock prior to detonation; the detonation could be followed by self luminosity.

After X-ray examination, the satisfactory charges were machined to 3.81 cm diam x 15.25 cm length. Charge density was 1.71-1.72 g/cc. The initiating shock was provided by two standard tetryl pellets (5.08 cm diam x 2.54 cm long,  $\rho_0 = 1.51$  g/cc) followed by a gap of 0 to 37.4 mm of polymethyl methacrylate (PMMA) and cellulose acetate sheeting; the gap material also had a diameter of 5.08 cm. The calibration for this standard donor/gap system is given in Ref (3).

Fig. 1 shows typical electronic records for Shot 13. All electronic records were processed by the semi-automatic procedure fully described previously.<sup>2</sup> Fig. 2 shows the smear camera record from the same charge (Smear Camera Record 297). The detonation velocity was obtained by fitting the x-t data to a hyperbolic function as described in Ref (4).

## DISCUSSION OF RESULTS

### Measurement of Detonation Velocity

The continuous wire method was originally designed to measure detonation velocity (D). Although this measurement is of only secondary interest in transitional studies, a comparison of the results from optical and electronic measurements is of value for other studies. Table 1 contains the velocity results from: (a) the Differential record, (b) the Moleculoy-Cu circuit record, and (c) the smear camera record. They are all essentially the same, although the differential records give results that are, on the average, 1% lower than the other two records. The maximum difference, which occurs only once, is 3%. We can conclude that the continuous wire method will give detonation velocity measurements in Comp B equivalent to those from optical methods.

### Transitional Phenomena, Optical Records

The phenomena of interest in the shock-to-detonation transition are total delay time ( $\tau$ ), run length ( $X_d$ ), and time of chemical reaction prior to the onset of detonation. Of these, the smear camera records can give a measure of  $X_d$  and an estimate of  $\tau$ . From other transitional studies, it is assumed that detonation is

TABLE 1  
CONTINUOUS WIRE AND SMEAR CAMERA MEASUREMENTS  
OF DETONATION VELOCITY IN CAST COMP B

<u>Electronic</u>	<u>Shot No.</u>	<u>Camera</u>	<u>Detonation Velocity, mm/<math>\mu</math>sec</u>	
			<u>Electronic</u> <u>Diff.* Mol.**</u>	<u>Optical</u>
5	44		7.83 8.05	8.00
1	29		7.87 8.20	8.08
15	299		7.92 --	8.00
2	34		8.14 8.07	8.10
16	300		7.94 8.10	8.07
6	45		8.05 8.14	8.17
3	36		8.09 8.11	8.16
7	46		8.17 8.12	8.08
14	298		7.94 8.05	8.11
13	297		8.02 8.01	8.01
4	37		7.96 8.26	8.23
8	47		8.30 8.21	8.13

\* From Differential record.

\*\* From Moleculoy-Cu record.

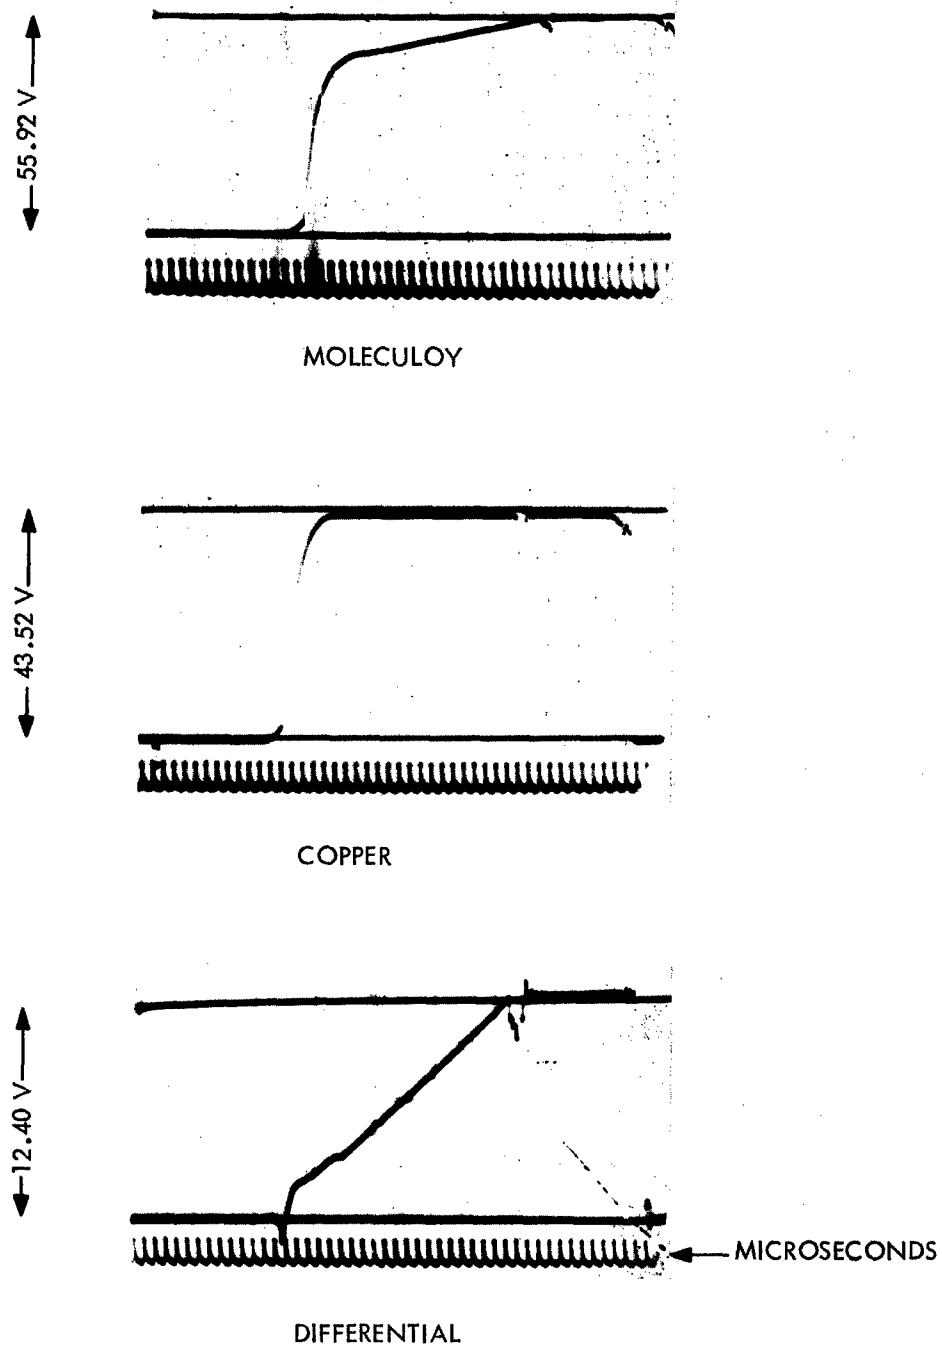


FIG. 1 ELECTRONIC RECORDS FOR SHOT 13 (GAP THICKNESS 145 CARDS)



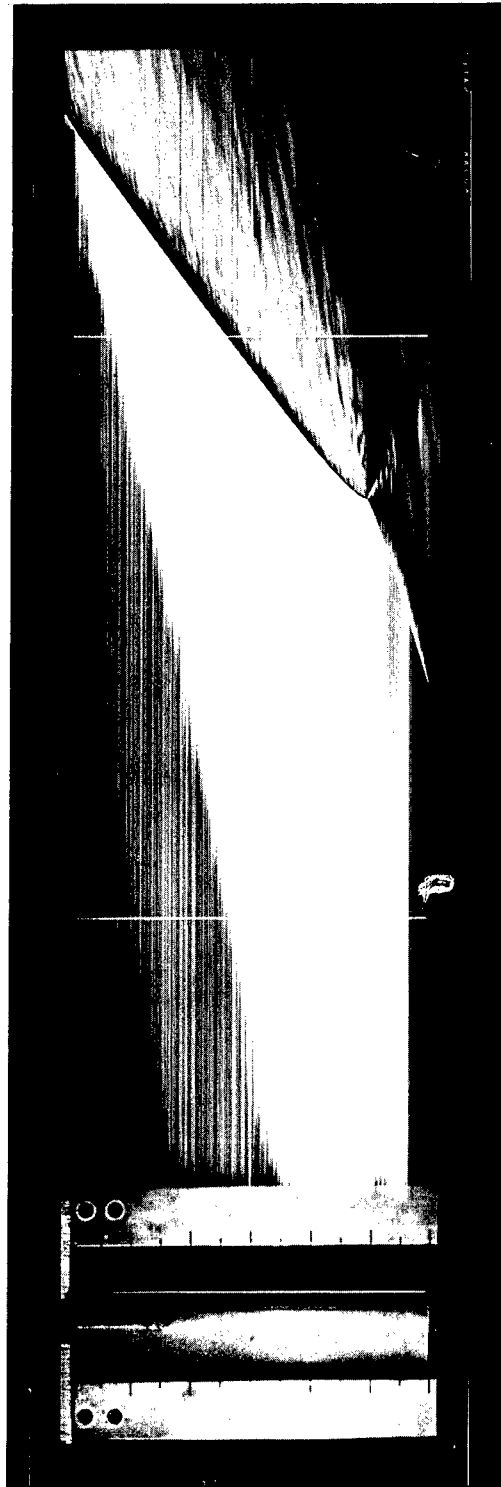


FIG.2 OPTICAL RECORD OF SHOCK-TO-DETONATION TRANSITION FOR  
SHOT 13 ( GAP THICKNESS 145 CARDS )

initiated on the axis of the charge and then spreads in a hemispherical front. Hence the point of its break-out on the charge surface is at a distance  $X_L$  from the point of entry of the initiating shock. This point is located at the intersection of the trace of the predetonation shock and the detonation wave (See Fig. 2). From the  $X_L$  value and the writing speed of the camera, an approximate delay time  $\tau_a$  can be obtained. It is actually the predetonation time on the surface of the charge, but because of the curved surface of the initiating shock and the time required for detonation to spread from the charge axis to the charge surface, we cannot relate it exactly to the delay time on the axis of the charge.

The data  $X_L$ ,  $\tau_a$  from the smear camera records are listed in Table 2 and plotted in Fig. 3. The curve  $\tau_a$  vs  $X_L$  is smooth, apparently linear, and extrapolates to  $\tau_a = -0.6 \mu\text{sec}$  at  $X_L = 0$ . This suggests that the true delay time is near  $(\tau_a + 0.6)$ . Fig. 4 displays the data, initiating shock pressure  $P_e$  vs  $X_L$ ; again the curve is smooth and shows the trends established by other transitional studies. The log-log plots of  $P_e$  vs  $X_L$  and of excess delay time\* vs  $X_L$  are linear as is the case with other good transitional data. In other words, the smear camera records provide precise and consistent  $X_L$ ,  $\tau$  data.

The camera records do not, however, give any information about the time of predetonation reaction. Typically they show only a smoothly accelerating shock with most of the acceleration occurring just before detonation breaks out. In Fig. 2 the initial shock velocity is  $3.00 \text{ mm}/\mu\text{sec}$  and the velocity has reached  $3.70 \text{ mm}/\mu\text{sec}$  when the shock trace is obscured by the detonation break-out at  $X_L$ .

#### Transitional Phenomenon, Electronic Records

In contrast to the optical records, the electronic ones do provide some information on the time of chemical reaction prior to the onset of detonation. Such transitional reactions would be

---

\* Excess delay time is  $(\tau_a + 0.6) - X_L D^{-1}$

TABLE 2  
OPTICAL AND ELECTRONIC MEASUREMENTS OF  
RUN LENGTH AND DELAY TIME IN CAST COMP B

Gap No. card	Shock Pressure* kbar	Optical Results		Electronic Results			Shot Nos. Electronic Camera
		$X_L$ mm	$\tau_a$ $\mu$ sec	$\Delta t^{**}$ $\mu$ sec	$X_L$ mm	$\tau$ $\mu$ sec	
0	--	--	--	--	--	--	10
0	--	--	--	--	--	--	5
1	--	--	--	--	--	--	1
40	107.0	$\sim 0$	$\sim 0$	0.4	5.4	2.0	15
75	75.3	6.44	1.43	1.8	7.2	2.7	2
90	66.8	9.34	2.32	1.4	10.4	3.0	16
100	62.1	10.49	2.51	1.9	14.3	3.5	6
125	49.7	17.57	4.64	--	18.9	5.1	3
140	42.9	25.60	7.15	5.5	21.4	7.0	7
140	42.9	22.23	6.11	4.9	32.4	7.0	14
145	40.7	26.16	7.24	6.0	28.4	7.3	13
150	37.9	46.60	12.89	11.5	46.9	13.6	4
151	37.7	42.07	11.23	--	46.7	12.8	8
151	37.7	No detonation		--			--
							297
							37
							47
							32
							300
							45
							36
							46
							298

\* This is initial amplitude of shock entering the Comp B acceptor. It was calculated from shock pressure at end of the gap<sup>3</sup> and Hugoniot data for Comp B.5

\*\* Time at which Cu record reaches zero volt line minus time at which Cu record first shows rise from imposed negative voltage ( $\sim -40V$ ).

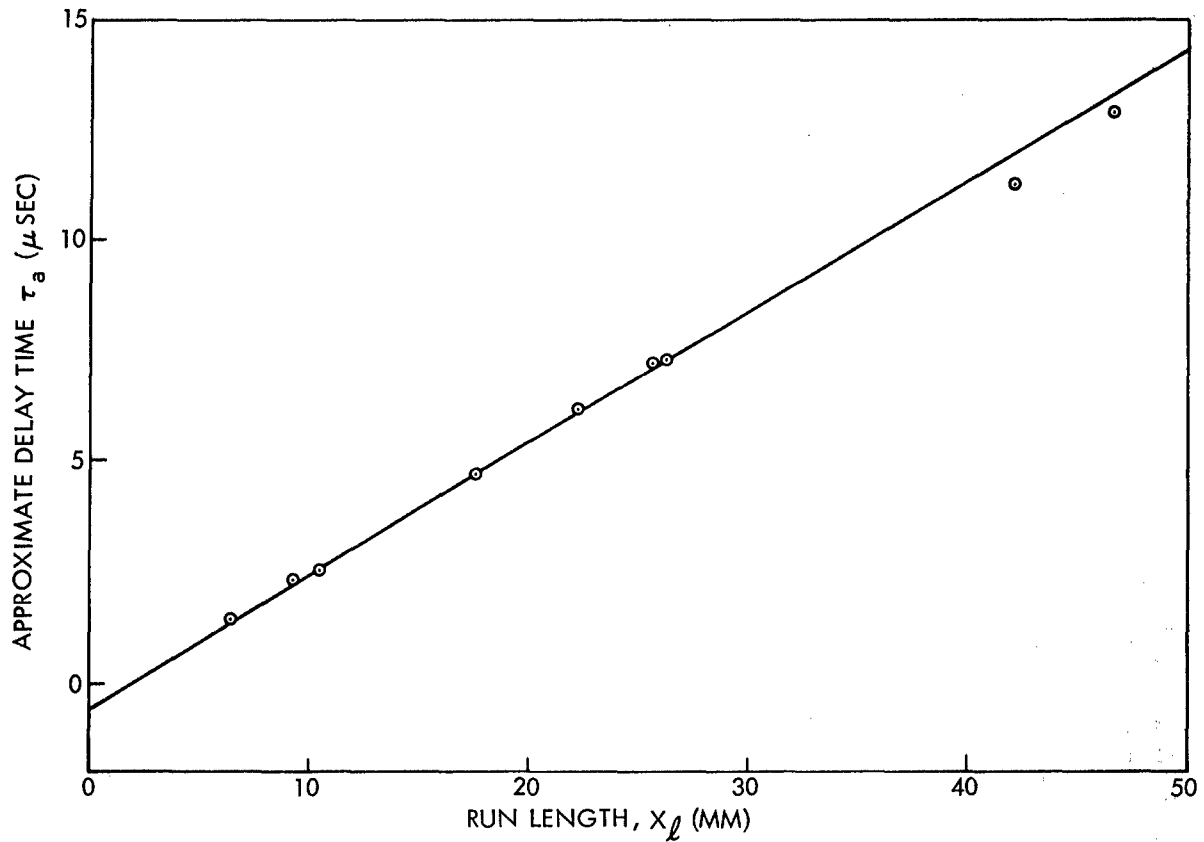


FIG. 3  $\tau_a$  VS  $X_L$  FROM SMEAR CAMERA MEASUREMENTS IN CAST COMP B

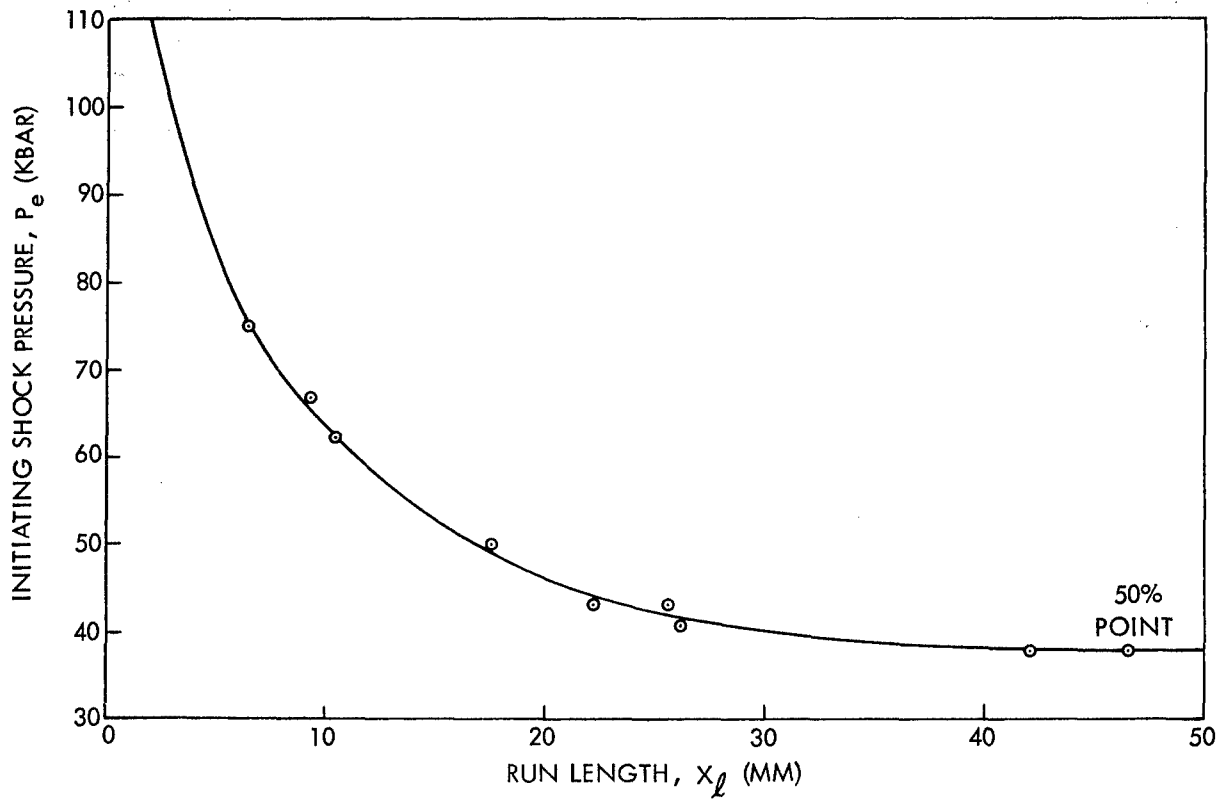


FIG. 4  $P_e$  VS  $X_L$  FROM SMEAR CAMERA MEASUREMENTS IN CAST COMP B

indicated by electrical conductance of their products and this conductance should be measured by the Cu-Cu(ground) circuit. In the case of DINA,<sup>1</sup> the pre-detonation conductance could not be observed\*; consequently it was possible to use the time at which this circuit registered zero resistance as the moment at which detonation began. For Comp B, the situation is very different. As the data of Table 2 show, at moderate initiating pressures, this interval was  $\sim 1.5 \mu\text{sec}$ , and it increased to  $11.5 \mu\text{sec}$  as the initiating pressure approached its minimum value (50% point). DINA has a zero oxygen balance to CO whereas Comp B has one of -10%. In thermal decomposition at the hot spots, the products should not be very different, but the free carbon from Comp B would probably increase the conductance of the products above that to be expected from the DINA products (carbon free). Although this factor may account for part of the difference in this measurement, it does not seem likely to account for a 10-fold difference in the duration of the transitional reactions. We suggest that the major difference lies in the rate of growth to detonation from burning in the ignition areas. This rate seems high for DINA and relatively lower for Comp B. Of course, DINA requires that the accelerated burning generate a pressure of only about 15 kbar whereas Comp B requires about 38 kbar to achieve detonation. Even at the same burning rate, Comp B would therefore require a longer time to achieve detonation.

The Cu circuit records for shock-to-detonation transition in DINA were sharp and easily read.<sup>1</sup> They provided a time for the onset of detonation which approximated the beginning of the straight line portions of both the Differential and the Moleculoy records. This is not the case for Comp B. Here the Cu record trace frequently approaches the zero volt line asymptotically so that an end point (beginning of detonation) is difficult to select. Moreover,

---

\* If present, its duration was less than  $0.5 \mu\text{sec}$ . In two charges, an interval of about  $1 \mu\text{sec}$  was observed.

the time so chosen does not seem to coincide with the beginning of detonation on the other two records. Consequently in the present work, the time of detonation onset was selected as that most consistent with all three records; a triple plot of voltage vs time was examined for each charge and particular weight was given to a time which appeared to be at the beginning of the straight line portion of both the Moleculoy and the Differential records. This procedure did not give satisfactory results for DINA, and, as will be shown, does not give acceptable results for Comp B either.

The values  $X_d$  and  $\tau$  obtained from the continuous wire records are also listed in Table 2, and plotted  $\tau$  vs  $X_d$  in Fig. 5. Here the scatter is so great that a straight line ending at the origin is used. Within the same large scatter,  $P_e$  vs  $X_d$  shows the usual trend (Fig. 6). But comparison of Figs. 3 and 4 with Figs. 5 and 6 readily shows the inadequacy of the electronic measurements. Although, as Fig. 7 shows, they are undoubtedly correlated with the optical results, they are too imprecise to be used for quantitative work. We conclude that the continuous wire method is inadequate for measuring  $X_d$  and  $\tau$  in shock-to-detonation transitions of Comp B.

Because the Moleculoy and Cu circuits are not independent,<sup>1</sup> a few shots were made to compare the results from the Moleculoy records of charges containing two wires with those of the three wire charges. Some of these results are shown in Table 3. The two wire system appears to give larger values (ca. 0.5  $\mu$ sec in  $\tau$  and 5-8 mm in  $X_d$ ), but these changes are no larger than errors that can be made in reading the records of a single shot or, indeed, of the maximum scatter of Fig. 5. It is not certain therefore whether the two wire system gives different results from those of the three wire system. Neither is satisfactory for measurements of transitional phenomena in Comp B.

#### CONCLUSIONS

The continuous wire method measures the detonation velocity of Comp B as precisely as does an optical method. It is, however, much too imprecise to measure run length or delay time in the shock-to-

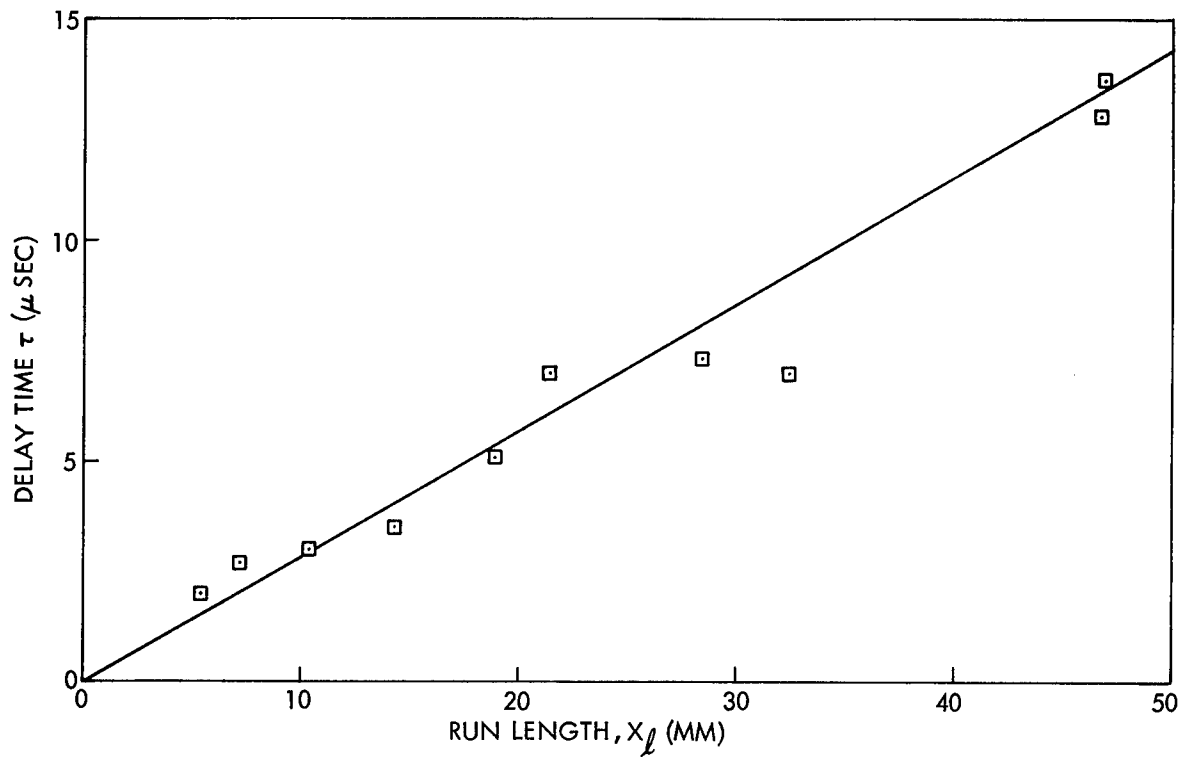


FIG. 5  $\tau$  VS  $X_\ell$  FROM CONTINUOUS WIRE MEASUREMENTS IN COMP B

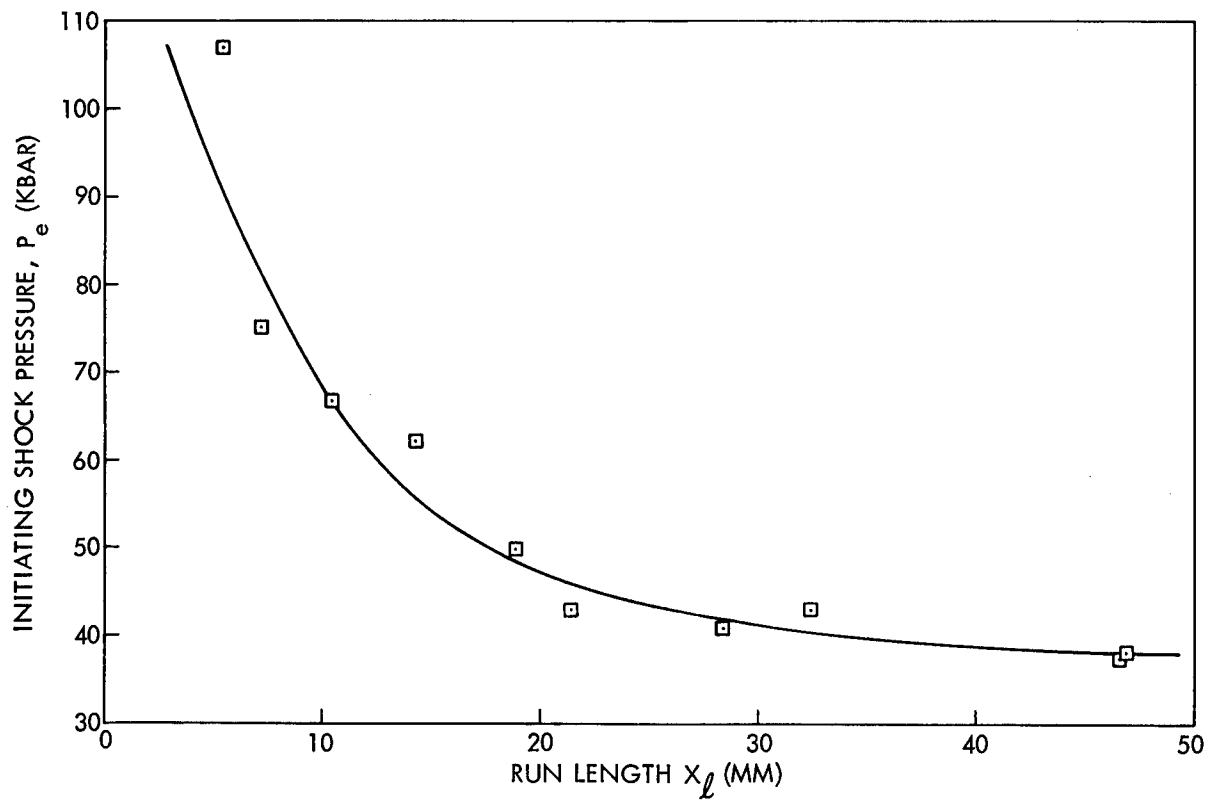


FIG. 6  $P_e$  VS  $X_\ell$  FROM CONTINUOUS WIRE MEASUREMENTS IN CAST COMP B

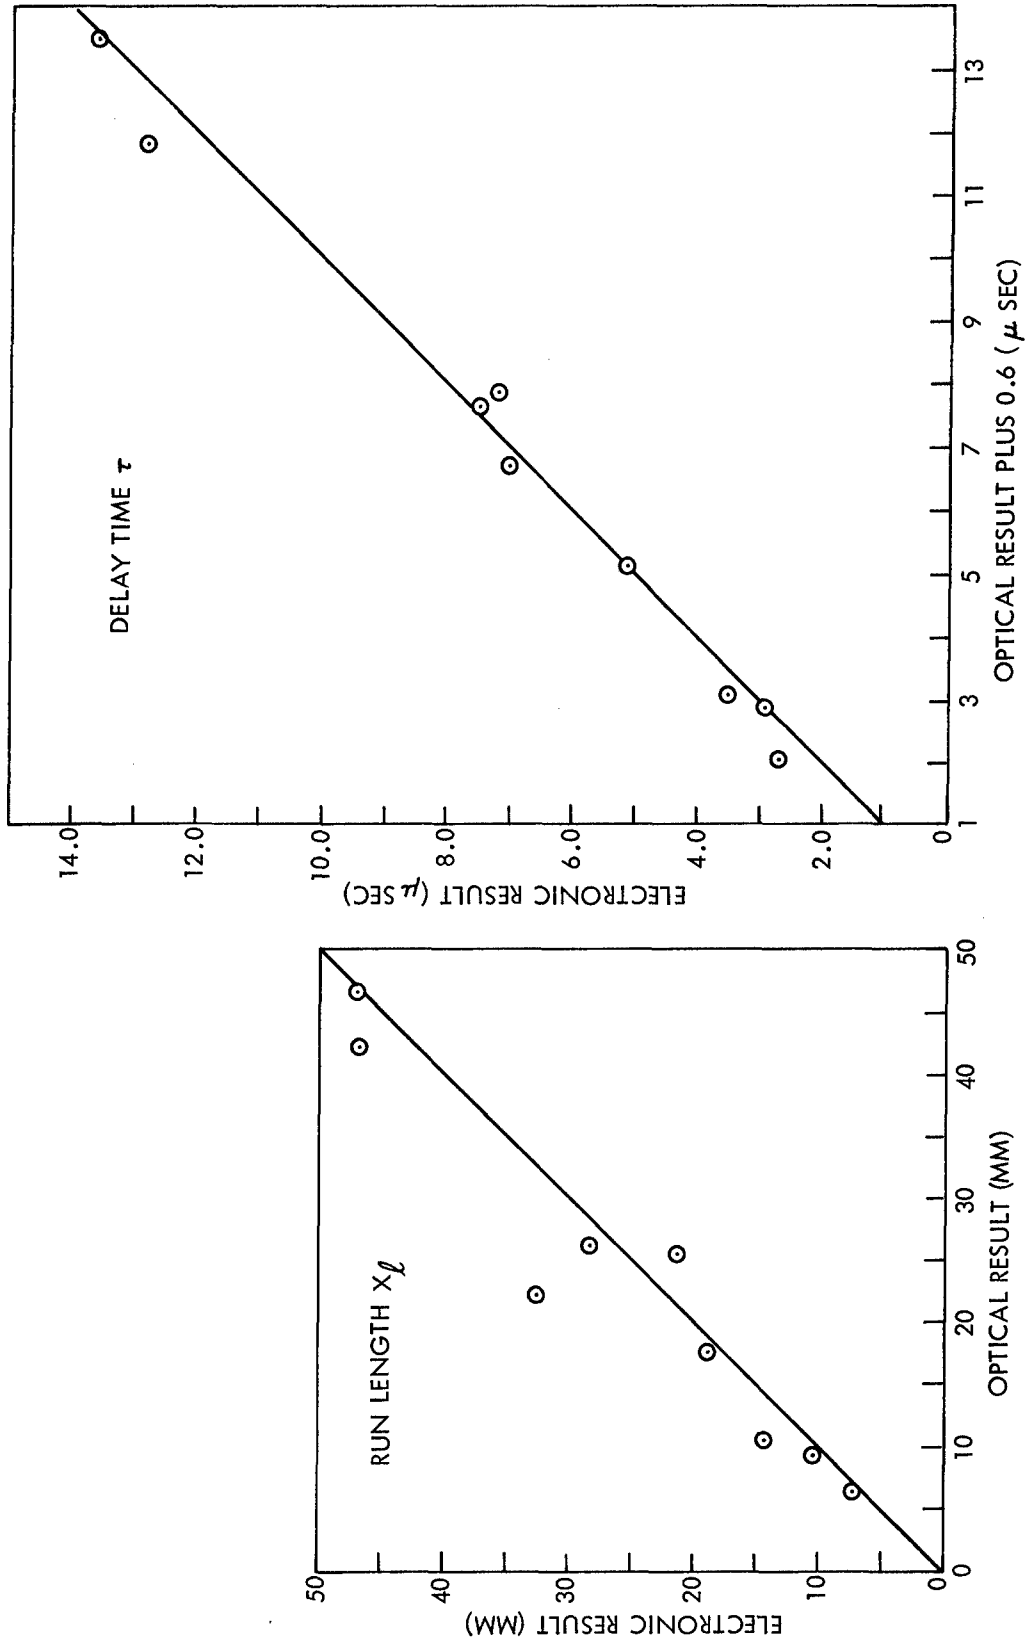


FIG. 7 ELECTRONIC VS OPTICAL MEASUREMENTS IN CAST COMP B



TABLE 3  
MEASUREMENTS IN TWO AND THREE WIRE CHARGES OF COMP B

<u>Shot No.</u> <u>Electronic Camera</u>	Gap No. cards	No. wires in Charge	Electronic Results		Optical Results	
			$\tau$ $\mu\text{sec}$	$X_L^*$ mm	$X_L$ mm	$\tau_a$ $\mu\text{sec}$
6	45	3	3.6	12.5	10.5	2.5
17	301	3	3.6	13.4	11.9	**
18	302	2	4.1	20.4	11.7	**
3	36	3	5.1	17.4	17.6	4.6
11	295	2	5.7	22.4	16.5	**
12	296	2	5.5	25.4	16.8	**

\* Read from Moleculoy records; results in Table 2 read from Differential records.

\*\* Record of detonation (self-luminosity) only.

NOLTR 68-30

detonation transitions of this explosive. Its inadequacy here probably results from the slow growth to detonation in Comp B as compared to the relatively fast growth in DINA where its measurements seemed more satisfactory.

REFERENCES

1. D. Price, J. P. Toscano, & I. Jaffe, Development of the Continuous Wire Method. Progress Rept. III. Measurements in Cast DINA, NOLTR 67-10 (20 Apr 1967).
2. D. Price, I. Jaffe, & J. P. Toscano, Development of Continuous Wire Method. Progress Rept. II, NOLTR 66-21 (17 Mar 1966).
3. T. P. Liddiard, Jr. & D. Price, Recalibration of the Standard Card-Gap Test, NOLTR 65-43 (20 Aug 1965).
4. A. R. Clairmont & I. Jaffe, Analysis of the Optical Determination of Detonation Velocity in Short Charges, NOLTR 64-23 (16 Mar 1964).
5. S. J. Jacobs, T. P. Liddiard, Jr., and B. E. Drimmer, The Shock-to-Detonation Transition in Solid Explosives, Ninth Symposium (International) on Combustion, Academic Press, New York (1963), pp 517-529.

## DISTRIBUTION

No. of  
Copies

Commander  
Naval Air Systems Command  
Department of the Navy  
Washington, D. C. 20360

AIR-350 . . . . . 1  
AIR-330 . . . . . 1

Commander  
Naval Ordnance Systems Command  
Department of the Navy  
Washington, D. C. 20360

ORD-9132 . . . . . 2  
ORD-0332 . . . . . 1  
ORD-033 . . . . . 1  
ORD-932 . . . . . 1  
ORD-0352 . . . . . 1  
ORD-0331 . . . . . 1

Director, Special Projects Office  
Department of the Navy  
Washington, D. C. 20360

SP-20 . . . . . 1  
SP-271 . . . . . 1  
SP-2710 . . . . . 1

Office of Naval Research  
Department of the Navy  
Washington, D. C. 20360  
Code 429 . . . . . 1

Commander  
U. S. Naval Weapons Center  
China Lake, California 93555  
Technical Library . . . . . 1

Commanding Officer  
U. S. Naval Ordnance Station  
Indian Head, Maryland 20640  
Library Division . . . . . 1

Commanding General  
Redstone Arsenal  
Huntsville, Alabama 35809  
Technical Library . . . . . 1

No. of  
Copies

Director, Applied Physics Laboratory 8621 Georgia Avenue Silver Spring, Maryland 20910 Library . . . . .	1
Director, U. S. Bureau of Mines Explosives Research Center 4800 Forbes Avenue Pittsburgh, Pennsylvania 15213 R. W. Van Dolah . . . . .	1
Defense Documentation Center Cameron Station Alexandria, Virginia 22314 TIPCR . . . . .	20
Armed Services Explosives Safety Board NASSIF Building Washington, D. C. 20315 . . . . .	1
Hercules Powder Company Allegany Ballistics Laboratory P. O. Box 210 Cumberland, Md. 21501 Robert Richardson . . . . .	1
Stanford Research Institute Poulter Laboratories Menlo Park, California 94025 M. W. Evans . . . . .	1
Rohm and Haas Redstone Arsenal Division Redstone Arsenal, Alabama 35809 Dr. H. Shuey . . . . .	1

UNCLASSIFIED

Security Classification

DOCUMENT CONTROL DATA - R&D		
(Security classification of title, body of abstract and indexing annotation must be entered when the overall report is classified)		
1. ORIGINATING ACTIVITY (Corporate author) U. S. Naval Ordnance Laboratory White Oak, Silver Spring, Md. 20910		2a. REPORT SECURITY CLASSIFICATION UNCLASSIFIED
		2b. GROUP
3. REPORT TITLE DEVELOPMENT OF THE CONTINUOUS WIRE METHOD PROGRESS REPORT IV. COMPARISON WITH OPTICAL MEASUREMENTS OF DETONATION PROPERTIES		
4. DESCRIPTIVE NOTES (Type of report and inclusive dates)		
5. AUTHOR(S) (Last name, first name, initial) Toscano, John P.; Clairmont, Jr., A. Robert; Jaffe, Irving I.; and Price, Donna		
6. REPORT DATE 2 April 1968	7a. TOTAL NO. OF PAGES 17	7b. NO. OF REFS 5
8a. CONTRACT OR GRANT NO.	9a. ORIGINATOR'S REPORT NUMBER(S) NOLTR 68-30	
b. PROJECT NO. MAT 03L 000/RO11 01 01 Prob 059		
c.	9b. OTHER REPORT NO(S) (Any other numbers that may be assigned this report)	
d.		
10. AVAILABILITY/LIMITATION NOTICES Distribution of this document is unlimited.		
11. SUPPLEMENTARY NOTES	12. SPONSORING MILITARY ACTIVITY Naval Ordnance Systems Command Naval Material Command	
13. ABSTRACT  Measurements made with the continuous wire method are compared to those obtained optically of shock-to-detonation transitions in cast Comp B. The electronic and optical results are equivalent in detonation velocity measurements as they are for other explosives. For the transitional phenomena (e.g., delay time and run-length) the electronic method is much less precise than the optical. Hence the continuous wire method is not adequate for making such measurements in cast Comp B.		

DD FORM 1 JAN 64 1473

UNCLASSIFIED

Security Classification

## UNCLASSIFIED

Security Classification

14. KEY WORDS	LINK A		LINK B		LINK C	
	ROLE	WT	ROLE	WT	ROLE	WT
Continuous Wire Measurements Shock-to-Detonation Transition Cast Comp B						

## INSTRUCTIONS

1. **ORIGINATING ACTIVITY:** Enter the name and address of the contractor, subcontractor, grantee, Department of Defense activity or other organization (*corporate author*) issuing the report.

2a. **REPORT SECURITY CLASSIFICATION:** Enter the overall security classification of the report. Indicate whether "Restricted Data" is included. Marking is to be in accordance with appropriate security regulations.

2b. **GROUP:** Automatic downgrading is specified in DoD Directive 5200.10 and Armed Forces Industrial Manual. Enter the group number. Also, when applicable, show that optional markings have been used for Group 3 and Group 4 as authorized.

3. **REPORT TITLE:** Enter the complete report title in all capital letters. Titles in all cases should be unclassified. If a meaningful title cannot be selected without classification, show title classification in all capitals in parenthesis immediately following the title.

4. **DESCRIPTIVE NOTES:** If appropriate, enter the type of report, e.g., interim, progress, summary, annual, or final. Give the inclusive dates when a specific reporting period is covered.

5. **AUTHOR(S):** Enter the name(s) of author(s) as shown on or in the report. Enter last name, first name, middle initial. If military, show rank and branch of service. The name of the principal author is an absolute minimum requirement.

6. **REPORT DATE:** Enter the date of the report as day, month, year; or month, year. If more than one date appears on the report, use date of publication.

7a. **TOTAL NUMBER OF PAGES:** The total page count should follow normal pagination procedures, i.e., enter the number of pages containing information.

7b. **NUMBER OF REFERENCES:** Enter the total number of references cited in the report.

8a. **CONTRACT OR GRANT NUMBER:** If appropriate, enter the applicable number of the contract or grant under which the report was written.

8b, 8c, & 8d. **PROJECT NUMBER:** Enter the appropriate military department identification, such as project number, subproject number, system numbers, task number, etc.

9a. **ORIGINATOR'S REPORT NUMBER(S):** Enter the official report number by which the document will be identified and controlled by the originating activity. This number must be unique to this report.

9b. **OTHER REPORT NUMBER(S):** If the report has been assigned any other report numbers (*either by the originator or by the sponsor*), also enter this number(s).

10. **AVAILABILITY/LIMITATION NOTICES:** Enter any limitations on further dissemination of the report, other than those

imposed by security classification, using standard statements such as:

- (1) "Qualified requesters may obtain copies of this report from DDC."
- (2) "Foreign announcement and dissemination of this report by DDC is not authorized."
- (3) "U. S. Government agencies may obtain copies of this report directly from DDC. Other qualified DDC users shall request through \_\_\_\_\_."
- (4) "U. S. military agencies may obtain copies of this report directly from DDC. Other qualified users shall request through \_\_\_\_\_."
- (5) "All distribution of this report is controlled. Qualified DDC users shall request through \_\_\_\_\_."

If the report has been furnished to the Office of Technical Services, Department of Commerce, for sale to the public, indicate this fact and enter the price, if known.

11. **SUPPLEMENTARY NOTES:** Use for additional explanatory notes.

12. **SPONSORING MILITARY ACTIVITY:** Enter the name of the departmental project office or laboratory sponsoring (*paying for*) the research and development. Include address.

13. **ABSTRACT:** Enter an abstract giving a brief and factual summary of the document indicative of the report, even though it may also appear elsewhere in the body of the technical report. If additional space is required, a continuation sheet shall be attached.

It is highly desirable that the abstract of classified reports be unclassified. Each paragraph of the abstract shall end with an indication of the military security classification of the information in the paragraph, represented as (TS), (S), (C), or (U).

There is no limitation on the length of the abstract. However, the suggested length is from 150 to 225 words.

14. **KEY WORDS:** Key words are technically meaningful terms or short phrases that characterize a report and may be used as index entries for cataloging the report. Key words must be selected so that no security classification is required. Identifiers, such as equipment model designation, trade name, military project code name, geographic location, may be used as key words but will be followed by an indication of technical context. The assignment of links, roles, and weights is optional.

Security Classification

Naval Ordnance Laboratory, White Oak, Md.  
(NOL technical report 68-30).  
DEVELOPMENT OF THE CONTINUOUS WIRE METHOD.  
PROGRESS REPORT IV. COMPARISON WITH OPTICAL  
MEASUREMENTS OF DETONATION PROPERTIES,  
by J. P. Toscano and others. 2 April 1968.  
15p. illus., charts, tables. ONM task MAT  
03L 000/RO11 01 01. UNCLASSIFIED

Measurements made with the continuous wire  
method are compared to those obtained opti-  
cally of shock-to-detonation transitions in  
cast Comp B. The electronic and optical  
results are equivalent in detonation velocity  
measurements as they are for other explosives  
For the transitional phenomena (e.g., delay  
time and run-length) the electronic method  
is much less precise than the optical.  
Hence the continuous wire method is not ad-  
equate for making such measurements in cast  
Comp B.

1. Explosives -  
Composition B
2. Explosives -  
Detonation
3. Detonations -  
Velocity
- I. Title
- II. Toscano,  
John P.
- III. Project

Naval Ordnance Laboratory, White Oak, Md.  
(NOL technical report 68-30).  
DEVELOPMENT OF THE CONTINUOUS WIRE METHOD.  
PROGRESS REPORT IV. COMPARISON WITH OPTICAL  
MEASUREMENTS OF DETONATION PROPERTIES,  
by J. P. Toscano and others. 2 April 1968.  
15p. illus., charts, tables. ONM task MAT  
03L 000/RO11 01 01. UNCLASSIFIED

Measurements made with the continuous wire  
method are compared to those obtained opti-  
cally of shock-to-detonation transitions in  
cast Comp B. The electronic and optical  
results are equivalent in detonation velocity  
measurements as they are for other explosives  
For the transitional phenomena (e.g., delay  
time and run-length) the electronic method  
is much less precise than the optical.  
Hence the continuous wire method is not ad-  
equate for making such measurements in cast  
Comp B.

1. Explosives -  
Composition B
2. Explosives -  
Detonation
3. Detonations -  
Velocity
- I. Title
- II. Toscano,  
John P.
- III. Project

Naval Ordnance Laboratory, White Oak, Md.  
(NOL technical report 68-30).  
DEVELOPMENT OF THE CONTINUOUS WIRE METHOD.  
PROGRESS REPORT IV. COMPARISON WITH OPTICAL  
MEASUREMENTS OF DETONATION PROPERTIES,  
by J. P. Toscano and others. 2 April 1968.  
15p. illus., charts, tables. ONM task MAT  
03L 000/RO11 01 01. UNCLASSIFIED

Measurements made with the continuous wire  
method are compared to those obtained opti-  
cally of shock-to-detonation transitions in  
cast Comp B. The electronic and optical  
results are equivalent in detonation velocity  
measurements as they are for other explosives  
For the transitional phenomena (e.g., delay  
time and run-length) the electronic method  
is much less precise than the optical.  
Hence the continuous wire method is not ad-  
equate for making such measurements in cast  
Comp B.

1. Explosives -  
Composition B
2. Explosives -  
Detonation
3. Detonations -  
Velocity
- I. Title
- II. Toscano,  
John P.
- III. Project

Naval Ordnance Laboratory, White Oak, Md.  
(NOL technical report 68-30).  
DEVELOPMENT OF THE CONTINUOUS WIRE METHOD.  
PROGRESS REPORT IV. COMPARISON WITH OPTICAL  
MEASUREMENTS OF DETONATION PROPERTIES,  
by J. P. Toscano and others. 2 April 1968.  
15p. illus., charts, tables. ONM task MAT  
03L 000/RO11 01 01. UNCLASSIFIED

Measurements made with the continuous wire  
method are compared to those obtained opti-  
cally of shock-to-detonation transitions in  
cast Comp B. The electronic and optical  
results are equivalent in detonation velocity  
measurements as they are for other explosives  
For the transitional phenomena (e.g., delay  
time and run-length) the electronic method  
is much less precise than the optical.  
Hence the continuous wire method is not ad-  
equate for making such measurements in cast  
Comp B.

1. Explosives -  
Composition B
2. Explosives -  
Detonation
3. Detonations -  
Velocity
- I. Title
- II. Toscano,  
John P.
- III. Project